



# NEW COMPACT

PACKAGING  
MACHINE



**PANOTEC®**

# HIGH-LEVEL TECHNOLOGY FOR PACKAGING ON DEMAND

New Compack combines technology and savings.

A perfect tool for companies that need to produce medium to small batches or a small number of boxes. The machine is easy to operate and features the reliability of Panotec Systems.



## Suitable for:

- small to medium-sized enterprises
- need for medium-low productivity levels
- more than 3 boxes per minute
- production of small batches or in flexibility (batch size 1)

# TOOLS FOR CUTTING AND CREASING

## Completely automated positioning of the units

New Compack has 1 transversal unit and up to 12 longitudinal units. Each unit can be equipped with different types of tools and sets up automatically.

### Transversal unit



Groove cut



Standard creasing

### Longitudinal units



Pressure cut



Standard creasing

# CONTROL PANEL

The control terminal is detached from the machine and installed on a structure.



# CARDBOARD FEEDER



## AUTOMATIC CARDBOARD LIFTER (2 TO 4 LEVELS)

New Compack can be equipped with 2 (2CL) to 4 (4CL) cassettes for fanfold storage, in each cassette 2 fanfolds can be stored Side by Side (SbS) thus doubling the available fanfolds (max 8).

By using the cardboard lifter, the machine selects, the most suitable cardboard width available in order to optimize cardboard consumption.



## MULTIPLE: FANFOLD SIDE BY SIDE


With this configuration you can use 2 to 3 fanfolds Side by Side (1CL SbS).




## SINGLE

The machine can work with single cardboard sheets or with one fanfold stack or with both (1CL + F).

Dimensions of the cardboard: max 2500, min 400mm.

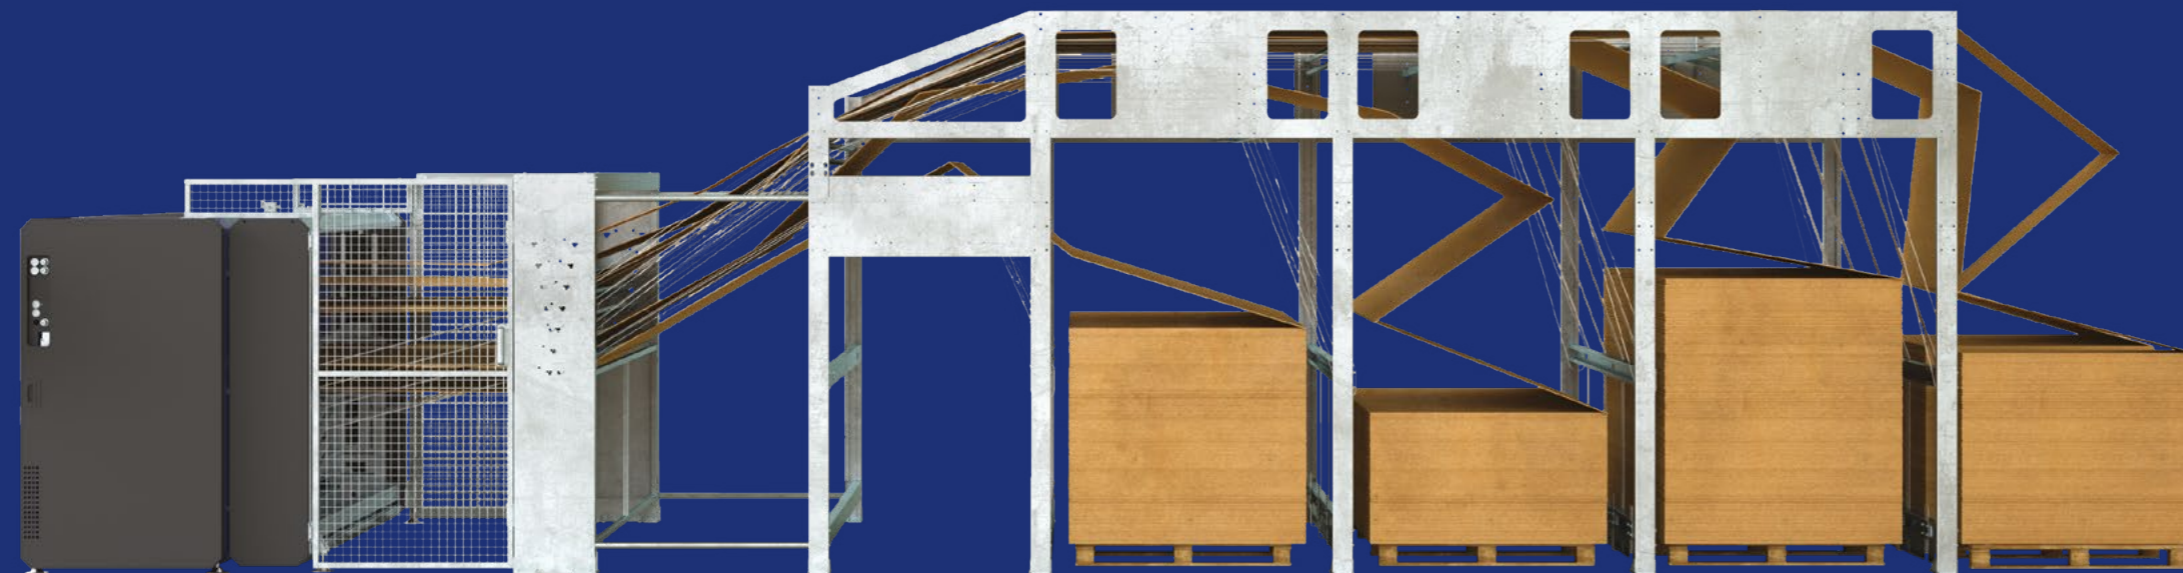

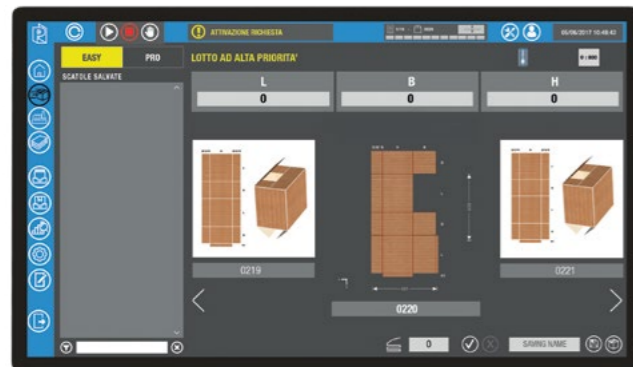

## BOXLINK PRO LIGHT

Production management software included with all packaging machines

Intuitive management of production and advanced features of:

- pre-set and custom box formats
- customer box archive
- production lists (max 5) to schedule production according to customer, product, time table etc.
- connection to the company network in order to manage production from your office or via your data management system
- production reports, remote SQL queries, production data reports
- data storage of the box types
- completely customizable combo-boxes (e.g. boxes with protections)
- assisted help desk showing the solution to the anomaly
- plug-in available: BOX DESIGNER
- compatible with Panotec Cloud Pro for QBOX and WEB REPORT



Esempio con selettore automatico

## TECHNICAL FEATURES

<b>Operating width</b>	2.5
<b>Operating mode</b>	automatic
<b>Productivity level</b>	medium - low
<b>Boxes / min.</b>	more than 3 / min
<b>Boxes / day (batch size 1)</b>	500-1000
<b>Boxes / day (in batches)</b>	1000-1500
<b>Feed rate</b>	40m / min
<b>Cardboard feed</b>	fanfold / sheets
<b>Cardboard feed cassettes</b>	up to 8 stacks of fanfold
<b>No. longitudinal units</b>	1 to 12
<b>Creasing</b>	standard
<b>Cardboard thickness</b>	2 mm to 7 mm
<b>Min. length open box</b>	420 mm
<b>Electrical connections</b>	400V / 50Hz (European) - 480V / 60Hz (USA)
<b>Power supply</b>	4 - 7.2 kW
<b>Compressed air</b>	min 6 bar (max. consumption 115 NI/min)
<b>Software</b>	Boxlink PRO Light
<b>Software Boxdesigner™</b>	available

# PANOTEC®

Headquarters  
Via G. Polese, 2  
31010 Cimadolmo (TV), Italia

T +39 0422 432715  
[www.panotec.com](http://www.panotec.com)  
[info@panotec.it](mailto:info@panotec.it)

