



# SMART

PACKAGING  
MACHINE

**PANOTEC®**

# THE PANOTEC YOU WANTED, NOW YOU CAN HAVE

Smart is the packaging machine that combines simplicity, reliability, and a compact footprint. Designed for companies seeking an efficient and cost-effective solution, Smart enables flexible production of packaging for a wide range of products, easily adapting to any production space. Easy to use and maintain, it's the Panotec you've always wanted: a packaging machine that boosts production efficiency while perfectly fitting within your budget.



## Particularly suitable for:

- Small-sized companies
- Basic production needs
- Over 2 boxes per minute
- Production of small batches or in flexibility (batch size 1)





# TOOLS FOR CUTTING AND CREASING

## Completely automated positioning of the units

Smart has 1 transversal unit and up to 7 longitudinal units.  
Each unit can be equipped with different types of tools and sets up automatically.

### Transversal Unit



Groove cut



Standard creasing

### Longitudinal units



Pressure cut



Standard creasing

## CONTROL PANEL

The control terminal is detached from the machine and installed on a structure.



## CARDBOARD FEEDER




### AUTOMATIC CARDBOARD LIFTER (2 LEVELS)


Two inline cardboard cassettes for fanfold storage, each designed to accommodate 2 side-by-side cardboard modules (Side by Side mode), doubling the capacity to 4 cardboards. With this configuration, the machine automatically selects the most suitable size from those available to optimize cardboard consumption.



### 1 LEVEL WITH 2 FANFOLD SIDE BY SIDE

The machine can operate with a single level accommodating 2 side-by-side cardboard modules (Side by Side mode).

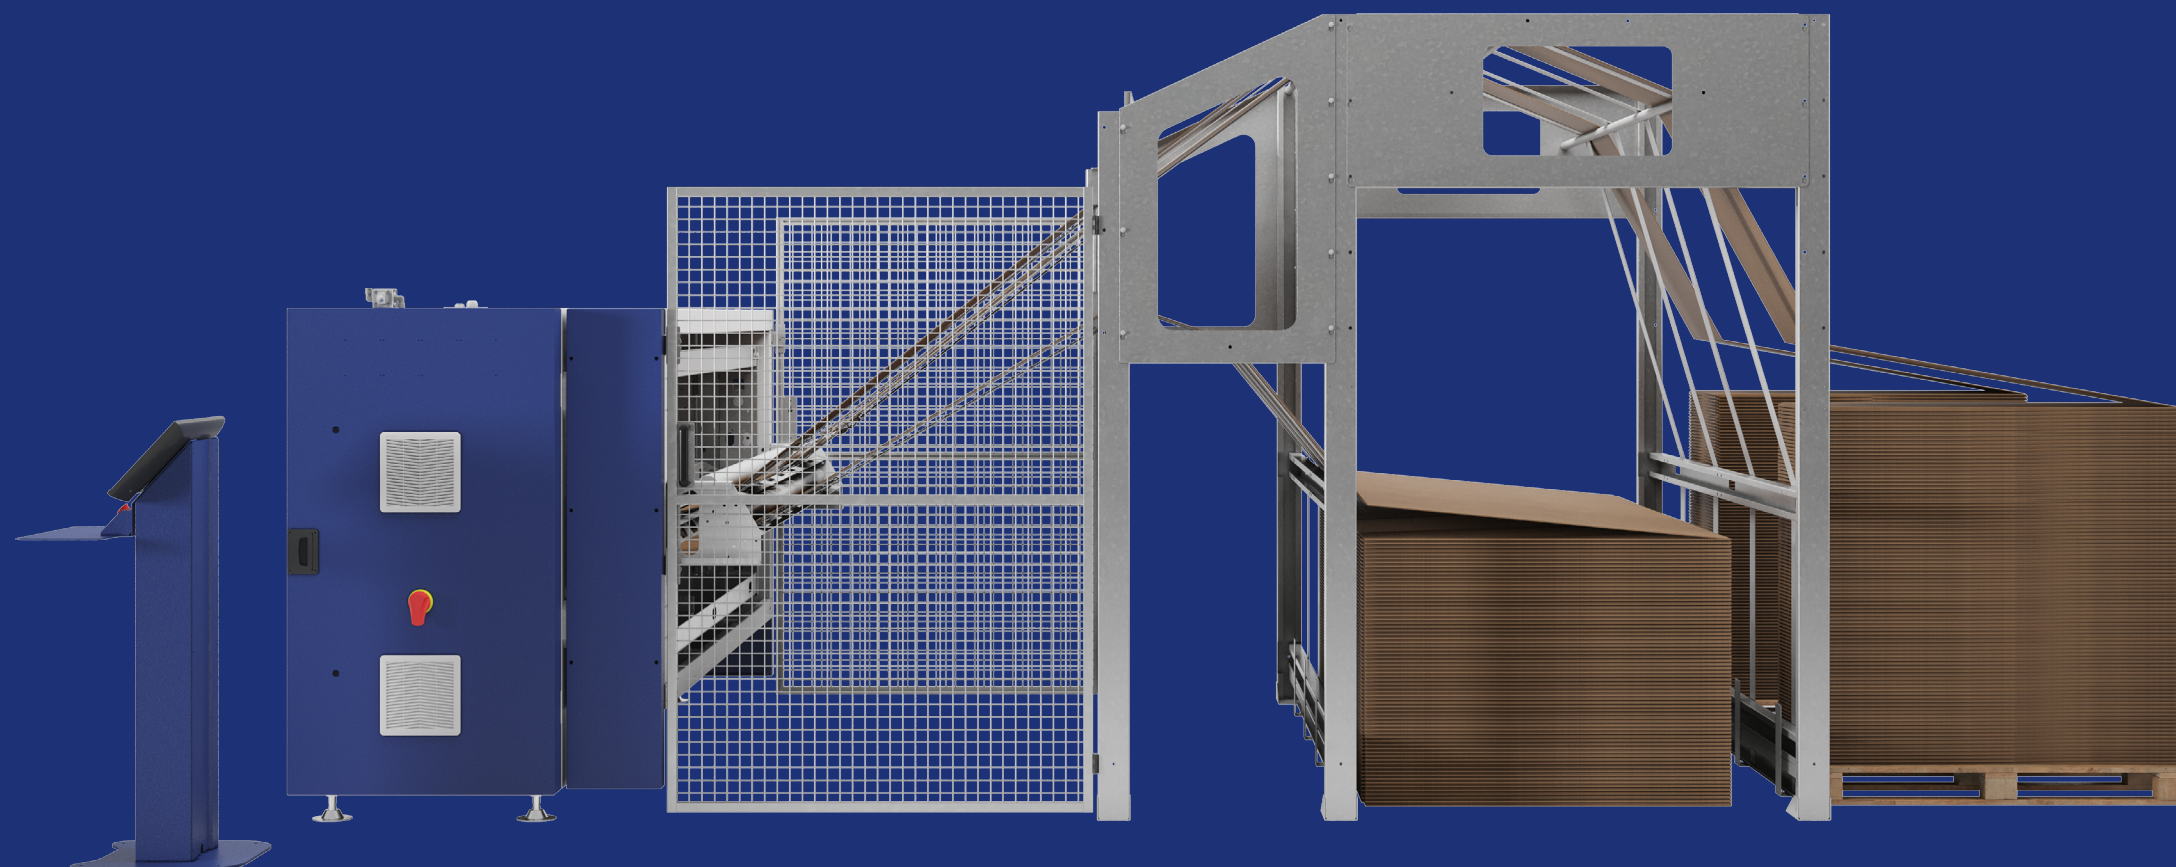

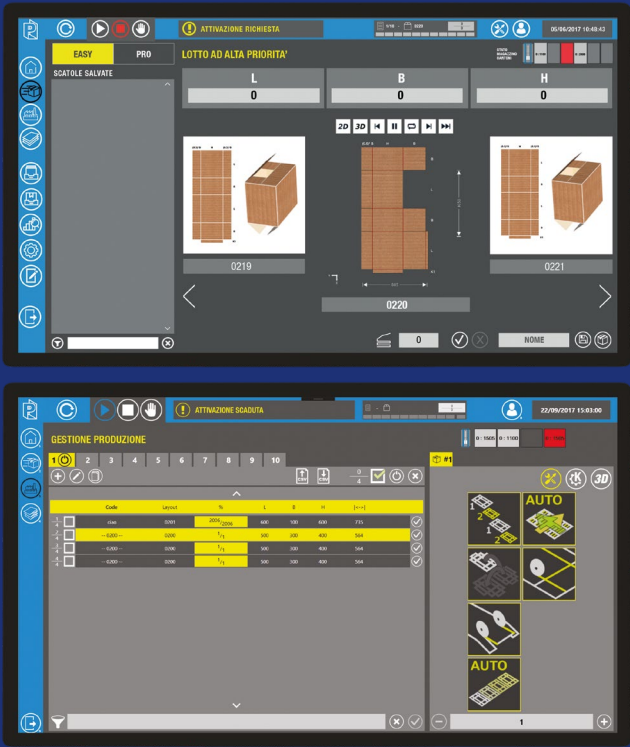

# BOXLINK PRO LIGHT


Production management software included with all packaging machines

Intuitive management of production and advanced features of:

- 15 Pre-existing Packaging Models
- Custom box formats
- Customer Box Archive
- Production Lists (max 5): To plan orders by customer, product, period, etc.
- Custom box format
- Connection with the Company Network: For managing production from the office or through the ERP system.
- Production Reports and Remote SQL Queries: Displaying reports of various production data.
- Archive of Cardboard Types Used
- Assisted Help Desk for Resolving Issues
- Compatible with Panotec Cloud Pro for QBOX and WEB REPORT

## WARRANTY UP TO 5 YEARS

Standard 3-year warranty upon maintenance by Panotec Service, extendable up to 5 years.\*

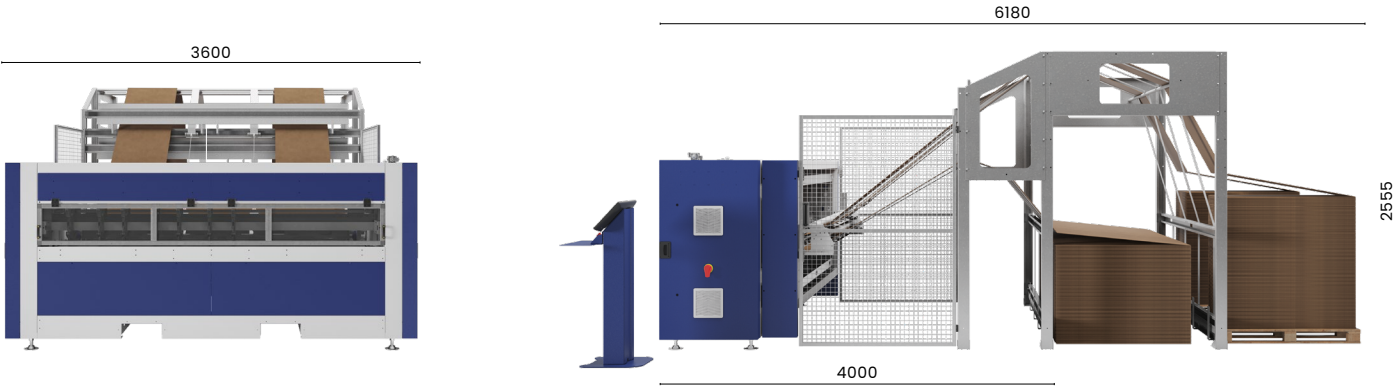

Example with automatic lifter

## TECHNICAL FEATURES

Workable Cardboard Width (m)	2.5
Operating mode	automatic
Productivity level	basic
Boxes / min.	more than 2 / min.
Boxes / day (batch size 1)	0-500
Boxes / day (in batches)	0-750
Feed rate	36m / min.
Cardboard feed	fanfold
Cardboard feed cassettes	up to 4 fanfold
No. longitudinal units	7
Creasing	standard
Cardboard thickness	from 2 mm to 5 mm
Min. length open box	420 mm
Electrical connections	400V / 50Hz (Europea) - 480V / 60Hz (USA)
Power supply	3 kVA / 6A
Compressed air	min. 6 bar (max. consumption 115 NI/min)
Software	Boxlink PRO Light
Software Boxdesigner™	optional



# PANOTEC®

*Sede operativa*  
Via G. Polese, 2  
31010 Cimadolmo (TV), Italia

T +39 0422 432715  
[www.panotec.com](http://www.panotec.com)  
[info@panotec.it](mailto:info@panotec.it)



\*Warranty valid only at retailers participating in the initiative.

12/24

